


- Category**
- Rod Wiper, Snap Fit
- Construction**
- Polyurethane 95°, black
- Housing**
- Open rectangular groove in one piece gland
- Duty**
- Medium
- Features**
- Easy installation
 - Proven design
- Comments**
- Common North American rod wiper series
- Size Range**
- US Imperial

Metric Specifications

Operating Conditions	Maximum Speed:	1.0 m/sec
	Temperature Range:	-40°C ~ 110°C
Surface Finish	Dynamic Sealing Face:	0.1 ~ 0.4 µmRa
	Static Sealing Face:	1.6 µmRa max
	Other Faces:	3.2 µmRa max

Imperial Specifications

Operating Conditions	Maximum Speed:	3.0 ft/sec
	Temperature Range:	-40°F ~ 230°F
Surface Finish	Dynamic Sealing Face:	4 ~ 16 µinCLA
	Static Sealing Face:	63 µinCLA max
	Other Faces:	125 µinCLA max

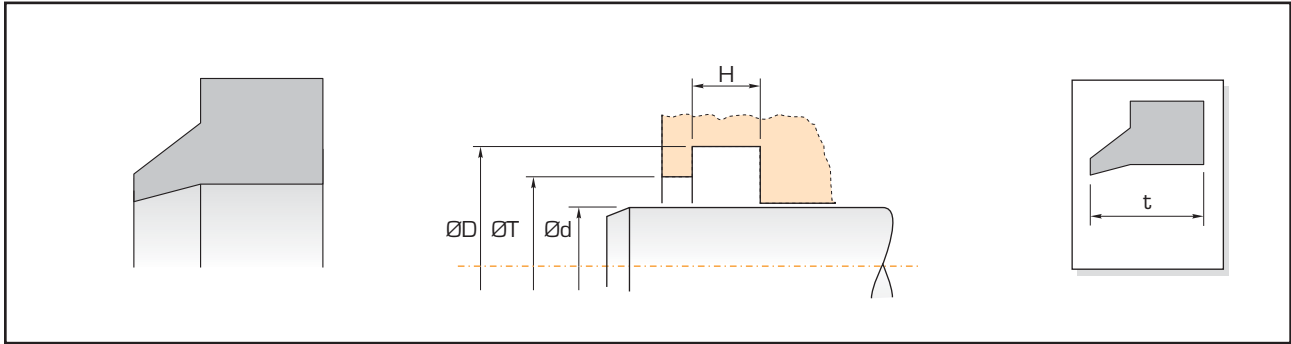

Imperial Sizes

Part No.	Ød	ØD	H	ØT	t
<i>Tolerances</i>		<i>±0.003</i>	<i>+0.004 -0</i>	<i>+0.010 -0</i>	
D0250B	0.250	0.500	0.124	0.410	0.210
D0312B	0.312	0.563	0.124	0.475	0.210
D0375B	0.375	0.625	0.124	0.535	0.210
D0437B	0.437	0.688	0.124	0.600	0.210
D0500B	0.500	0.750	0.124	0.660	0.210
D0562B	0.562	0.813	0.124	0.725	0.210
D0625B	0.625	0.875	0.124	0.785	0.210
D0687B	0.687	0.938	0.124	0.850	0.210
D0750B	0.750	1.125	0.187	0.995	0.305
D0812B	0.812	1.188	0.187	1.060	0.305
D0875B	0.875	1.250	0.187	1.120	0.305
D0937B	0.937	1.313	0.187	1.185	0.305
D1000B	1.000	1.375	0.187	1.245	0.305
D1062B	1.062	1.438	0.187	1.310	0.305
D1125B	1.125	1.500	0.187	1.370	0.305
D1187B	1.187	1.563	0.187	1.435	0.305
D1250B	1.250	1.625	0.187	1.495	0.305
D1312B	1.312	1.687	0.187	1.557	0.305
D1375B	1.375	1.750	0.187	1.620	0.305
D1500B	1.500	1.875	0.187	1.745	0.305
D1625B	1.625	2.000	0.187	1.870	0.305
D1750B	1.750	2.125	0.187	1.995	0.305
D1875B	1.875	2.250	0.187	2.120	0.305
D2000B	2.000	2.500	0.249	2.327	0.395
D2125B	2.125	2.625	0.249	2.452	0.395
D2250B	2.250	2.750	0.249	2.577	0.395
D2375B	2.375	2.875	0.249	2.702	0.395
D2500B	2.500	3.000	0.249	2.827	0.395
D2562B	2.562	3.063	0.249	2.890	0.395
D2625B	2.625	3.125	0.249	2.952	0.395
D2750B	2.750	3.250	0.249	3.077	0.395
D2875B	2.875	3.375	0.249	3.202	0.395
D3000B	3.000	3.500	0.249	3.327	0.395
D3125B	3.125	3.625	0.249	3.452	0.395
D3250B	3.250	3.750	0.249	3.577	0.395
D3375B	3.375	3.875	0.249	3.702	0.395
D3500B	3.500	4.000	0.249	3.827	0.395
D3625B	3.625	4.125	0.249	3.952	0.395
D3750B	3.750	4.250	0.249	4.077	0.395
D3875B	3.875	4.375	0.249	4.202	0.395
D4000B	4.000	4.500	0.249	4.327	0.395

Imperial Sizes (cont'd)

Part No.	Ød	ØD	H	ØT	t
D4125B	4.125	4.625	0.249	4.452	0.395
D4250B	4.250	4.750	0.249	4.577	0.395
D4375B	4.375	4.875	0.249	4.702	0.395
D4500B	4.500	5.250	0.374	4.993	0.585
D4625B	4.625	5.375	0.374	5.118	0.585
D4750B	4.750	5.500	0.374	5.243	0.585
D4875B	4.875	5.625	0.374	5.368	0.585
D5000B	5.000	5.750	0.374	5.493	0.585
D5125B	5.125	5.875	0.374	5.618	0.585
D5250B	5.250	6.000	0.374	5.743	0.585
D5375B	5.375	6.125	0.374	5.868	0.585
D5500B	5.500	6.250	0.374	5.993	0.585
D5625B	5.625	6.375	0.374	6.118	0.585
D5750B	5.750	6.500	0.374	6.243	0.585
D6000B	6.000	6.750	0.374	6.493	0.585
D6250B	6.250	7.000	0.374	6.743	0.585
D6375B	6.375	7.125	0.374	6.868	0.585
D6500B	6.500	7.250	0.375	6.993	0.585
D6750B	6.750	7.500	0.374	7.243	0.585
D6875B	6.875	7.625	0.374	7.368	0.585
D7000B	7.000	7.750	0.374	7.493	0.585
D7250B	7.250	8.000	0.374	7.743	0.585
D7500B	7.500	8.250	0.374	7.993	0.585
D7750B	7.750	8.500	0.374	8.243	0.585
D8000B	8.000	8.750	0.374	8.493	0.585
D8250B	8.250	9.000	0.374	8.743	0.585
D8500B	8.500	9.250	0.374	8.993	0.585
D8750B	8.750	9.500	0.374	9.243	0.585
D9000B	9.000	9.750	0.374	9.493	0.585
D9250B	9.250	10.000	0.374	9.743	0.585
D9500B	9.500	10.250	0.374	9.993	0.585
D9750B	9.750	10.500	0.374	10.243	0.585
D10000B	10.000	11.000	0.499	10.659	0.775
D10250B	10.250	11.250	0.499	10.909	0.775
D10500B	10.500	11.500	0.499	11.159	0.775
D11000B	11.000	12.000	0.499	11.659	0.775
D11500B	11.500	12.500	0.499	12.159	0.775
D12000B	12.000	13.000	0.500	12.659	0.775
D13750B	13.750	14.750	0.499	14.409	0.775
D14000B	14.000	15.000	0.499	14.659	0.775
D15750B	15.750	16.750	0.499	16.409	0.755